



### Door Kit Packaging for Delivery

Linings packed in plot lots ready for dispatch.

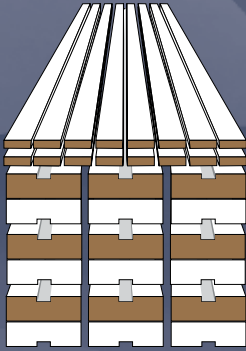


Eco-Pac box of hardware packed between doors.

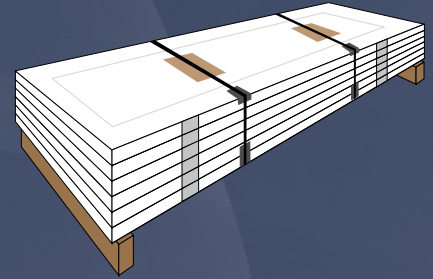


Door leaves prepared and packed ready.

### Standard Lining Components

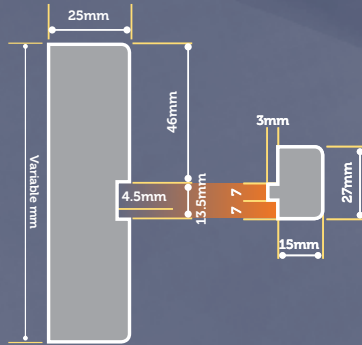

### FD30 Firecheck Lining Components

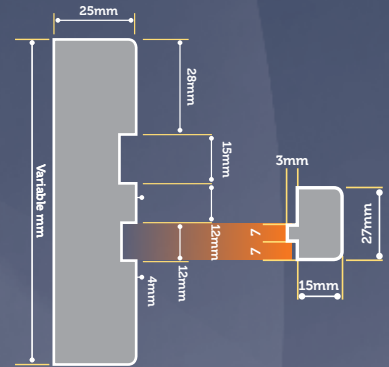

### Patented *quickassemble* adjustable, snap-in hinge system

Hinge cradles are secured to the door frame with the corresponding hinge receivers fitted to the door leaf. Installation, or hanging of the door, is then carried out simply by 'snapping' the door receivers onto the hinge jamb. Once in place the relative door position can be adjusted to ensure an optimum fit within the doorframe.

- Vertical adjustment - allows the door to be moved up or down +/- 2.5mm (This feature only applies to 3D hinges)
- Horizontal adjustment - allows the door to be moved left or right +/- 2.5mm
- Lateral adjustment - allows the door to be moved in or out of the doorframe rebate +/- 2.5mm
- Suitable for: 34 and 44mm thick doors



Adjust the hinge: Horizontally, To move the door side to side.



Adjust the hinge: Laterally, To move the door in and out.



Adjust the hinge: Vertically, To move the door up or down. (3D only)


### Fitting in 3 easy steps



Fit heads to legs and fix into structural opening



Snap in the door leaf to the frame

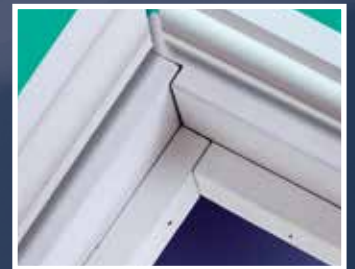

Fit stops and architrave